



GIB杆端关节轴承，内螺纹 Rod end bearings, female thread



产品特性 Product features

- 球体采用高耐磨材料EPB15制成
- 连接器采用高强度和尺寸稳定性材料M163制成
- 自润滑、免维护
- 光面设计耐灰尘
- 很好的耐腐蚀性能
- 补偿心中误差
- 无噪音、重量轻
- 带锁定螺母易安装
- Spherical ball made of highly wear-resistant EPB15
- Connection rod made of high strength and shape-stable M163
- Maintenance-free dry operation
- Smooth design has no dirt traps
- Absolute corrosion resistance
- Compensation of misalignment errors
- No noise and light weight
- Simple assembly due to the integrated lock nut

标准规格 Standard specifications

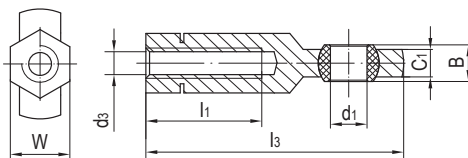

产品编码 Part No.:

GIBR-06

内径 Inner diameter
R: 右旋 Right
L: 左旋 Left

产品编码 Part No.	d ₁ [mm]	d ₂ [mm]	d ₃ [mm]	W [mm]	B [mm]	l ₁ [mm]	l ₃ [mm]	h ₁ [mm]	h ₂ [mm]	C ₁ [mm]	m [mm]	最大静态抗拉强度 Max. static tensile strength		最大径向静态负荷 Max. radial static load		最小 螺纹 深度 Min. thread depth	球体最大 扭矩 Max. tightening torque through ball	重量 Weight [g]
												短期 Short-term [N]	长期 Long-term [N]	短期 Short-term [N]	长期 Long-term [N]			
GIBR-06	6	21	M6	SW10	6	20	46.5	36.5	30	4.4	5.7	1500	750	200	100	8	2.5	4.5
GIBR-08	8	24	M8	SW13	8	25	56.3	44.3	36	6	7.5	2000	1000	450	225	11	7	8.6
GIBR-10	10	29	M10	SW15	9	30	67.2	52.2	43	7	8.4	2300	1150	500	250	13	14	14.1
GIBR-10F	10	29	M10*1.25	SW15	9	30	67.2	52.2	43	7	8.4	2300	1150	500	250	13	14	14.1
GIBR-12	12	34	M12	SW17	10	35	77.1	60.1	50	8	10	3300	1650	550	275	15	25	17.1
GIBR-12F	12	34	M12*1.25	SW17	10	35	77.1	60.1	50	8	10	3300	1650	550	275	15	25	17.1
GIBL-06	6	21	M6	SW10	6	20	46.5	36.5	30	4.4	5.7	1500	750	200	100	8	2.5	4.5
GIBL-08	8	24	M8	SW13	8	25	56.3	44.3	36	6	7.5	2000	1000	450	225	11	7	8.6
GIBL-10	10	29	M10	SW15	9	30	67.2	52.2	43	7	8.4	2300	1150	500	250	14	25	14.1
GIBL-10F	10	29	M10*1.25	SW15	9	30	67.2	52.2	43	7	8.4	2300	1150	500	250	13	14	14.1
GIBL-12	12	34	M12	SW17	10	35	77.1	60.1	50	8	10	3300	1650	550	275	15	25	17.1
GIBL-12F	12	34	M12*1.25	SW17	10	35	77.1	60.1	50	8	10	3300	1650	550	275	15	25	17.1